

Disassembling Lenovo ThinkVision Monitor to Install in Little Tikes™ Young Explorer™ Furniture

August 26, 2010



Step 1. Make sure to unplug both the power cable and video cable from the monitor and set aside from your work area. Simply pull the power cable plug out as shown in Fig.1. When unplugging the video cable from the monitor make sure that both connectors on each side are unscrewed from the monitor as shown in Fig.2 and then remove the cable.

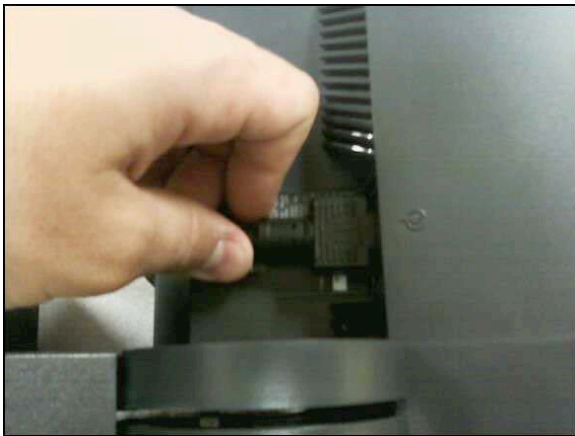


Figure 1

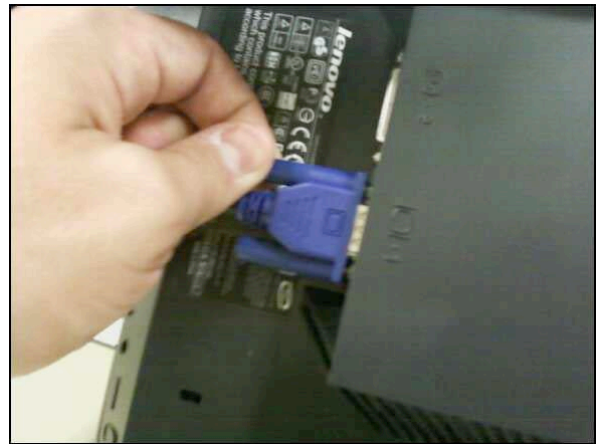


Figure 2

Step 2.

Place the monitor with the screen face down on something soft such as an office chair or cushion. Make sure you have enough room for the base stand to move off the edge but not far enough to risk the monitor falling to the ground. Make sure that the stand is pushed the farthest it can toward the screen as show in Fig.3.



Figure 3

Step 3.

Now we are ready to begin the first part of disassembly. If you look at either side of what looks like a cylinder shaped joint between the monitor you will see a symbol that look like a CD ejection icon shown on Fig.4. This is where you will apply pressure that will remove the covering cap to the monitor-mounting bracket. Now with both hands apply pressure on both sides and slowly pull straight towards the screen to the point shown on Fig.5.



Figure 4



Figure 5

Here comes the tricky part. There are small prongs shown on Fig.6, still holding the cap to the monitor that can be easily broken off if you pull too far toward the screen with enough force. These prongs are located toward the middle of the monitor and need to be slowly wiggled side to side out of place shown on Fig.7. Once you have done this you should be able to remove the cap from the monitor and should look something like Fig.8 below. The hardest part of the disassembly is over!



Figure 6



Figure 7

Step 4.

Now that the cap is removed you should see a metal mounting bracket with four screws. Your next step is to remove these screws from the bracket holding the stand to the monitor, shown in Fig.8 You will need a Philips head screwdriver to remove the screws. As you remove the screws, use one hand to hold onto the base so it does not fall or break. Set the base aside when you are done removing the screws. You should now have nothing attached to the monitor as shown in Fig.9. Your monitor is now ready to be placed between the bracket and the Plexiglas on the furniture of your Young Explorer.



Figure 8



Figure 9